

# T&D Optional Products Catalog

## Temperature Sensors



TR-0106 -----	p.2	TR-5320 -----	p.6
TR-0206 -----	p.2	TR-5420 -----	p.6
TR-0306 -----	p.2	TR-5530 -----	p.6
TR-0406 -----	p.3	TR-5620 -----	p.7
TR-0506 -----	p.3	Pt Sensors -----	p.8
TR-0706 -----	p.3		
TR-1106 -----	p.4		
TR-1220 -----	p.4		
TR-1320 -----	p.4		
TR-5101 -----	p.5		
TR-5106 -----	p.5		
TR-5220 -----	p.5		

### Sensor Extension Cables


TR-1C30 -----	p.9
TR-5C10 -----	p.9
TR-2C30 -----	p.9

## TR-0106



Provided with TR-71wb and TR-71nw

### TPE Resin-Shielded Sensor

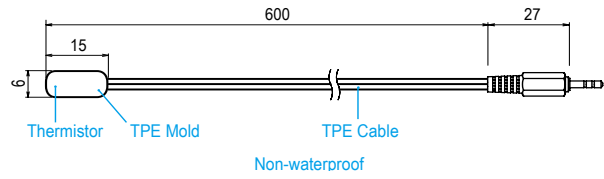


[Unit: mm]

Measurement Range	-40 to 110°C
Temperature Durability	-50 to 115°C
Accuracy	Avg. $\pm 0.3^\circ\text{C}$ at -20 to 80°C, Avg. $\pm 0.5^\circ\text{C}$ at -40 to -20°C, 80 to 110°C
Response Time (90%)	Approx. 190 sec. (in air)
Waterproof Capacity	None
Notes	Can be extended by 3 meters with the Extension Cable TR-1C30 / TR-5C10

## TR-0206



### Screw-down Sensor

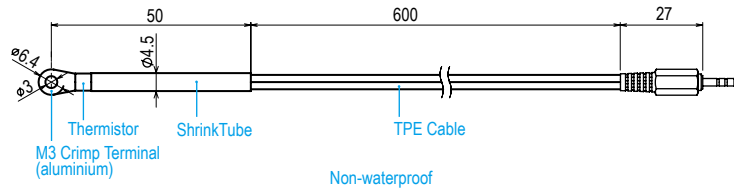


[Unit: mm]

Measurement Range	-40 to 110°C
Temperature Durability	-50 to 115°C
Accuracy	Avg. $\pm 0.3^\circ\text{C}$ at -20 to 80°C, Avg. $\pm 0.5^\circ\text{C}$ at -40 to -20°C, 80 to 110°C
Response Time (90%)	Approx. 210 sec. (in air)
Waterproof Capacity	None
Notes	Can be extended by 3 meters with the Extension Cable TR-1C30 / TR-5C10

## TR-0306



### Stainless Protection Sensor

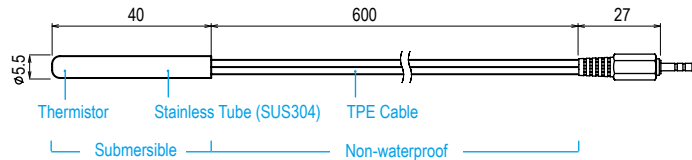


[Unit: mm]

Measurement Range	-40 to 110°C
Temperature Durability	-50 to 115°C
Accuracy	Avg. $\pm 0.3^\circ\text{C}$ at -20 to 80°C, Avg. $\pm 0.5^\circ\text{C}$ at -40 to -20°C, 80 to 110°C
Response Time (90%)	Approx. 11 sec. (in agitated water)
Waterproof Capacity	Submersible (stainless protection tube)
Notes	Can be extended by 3 meters with the Extension Cable TR-1C30 / TR-5C10

TR-0406



Stainless Protection Sensor

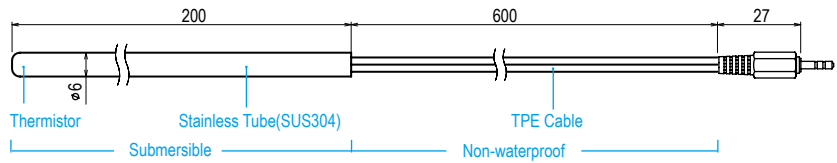


[Unit: mm]

Measurement Range	-40 to 110°C
Temperature Durability	-50 to 115°C
Accuracy	Avg. ±0.3°C at -20 to 80°C Avg. ±0.5°C at -40 to -20°C, 80 to 110°C
Response Time (90%)	Approx. 15 sec. (in agitated water)
Waterproof Capacity	Submersible (stainless protection tube)
Notes	Can be extended by 3 meters with the Extension Cable TR-1C30

TR-0506



Stainless Protection Sensor

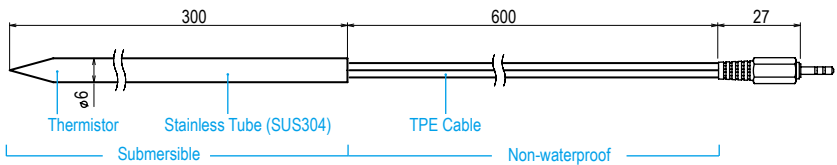


[Unit: mm]

Measurement Range	-40 to 110°C
Temperature Durability	-50 to 115°C
Accuracy	Avg. ±0.3°C at -20 to 80°C, Avg. ±0.5°C at -40 to -20°C, 80 to 110°C
Response Time (90%)	Approx. 10 sec. (in agitated water)
Waterproof Capacity	Submersible (stainless protection tube)
Notes	Can be extended by 3 meters with the Extension Cable TR-1C30 / TR-5C10

TR-0706



Stainless Protection Sensor

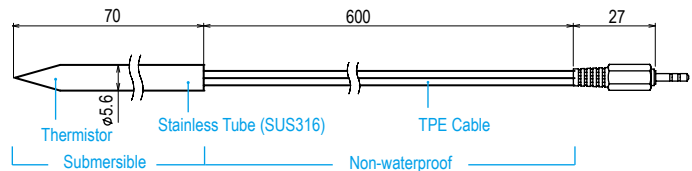


[Unit: mm]

Measurement Range	-40 to 110°C
Temperature Durability	-50 to 115°C
Accuracy	Avg. ±0.3°C at -20 to 80°C, Avg. ±0.5°C at -40 to -20°C, 80 to 110°C
Response Time (90%)	Approx. 11 sec. (in agitated water)
Waterproof Capacity	Submersible (stainless protection tube)
Notes	Can be extended by 3 meters with the Extension Cable TR-1C30 / TR-5C10

TR-1106



Fluoropolymer Coated Sensor

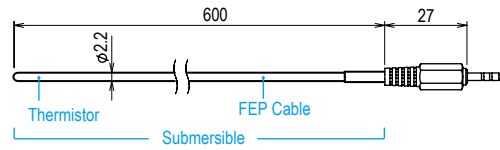


[Unit: mm]

Measurement Range	-60 to 155°C
Temperature Durability	-70 to 180°C
Accuracy	Avg. ±0.5°C at -40 to 80°C Avg. ±1.0°C at -60 to -40°C, 80 to 100°C Avg. ±2.0°C at 100 to 155°C
Response Time (90%)	Approx. 80 sec. (in air) Approx. 7 sec. (in agitated water)
Waterproof Capacity	Submersible
Notes	Can be extended by 3 meters with the Extension Cable TR-1C30 / TR-5C10

TR-1220



Stainless Protection Sensor

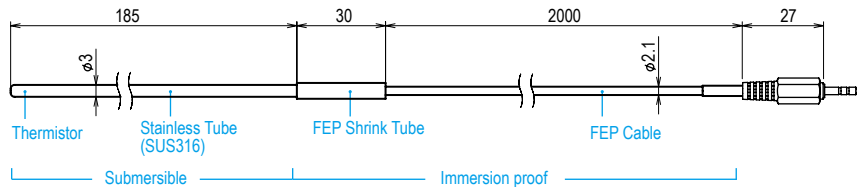


[Unit: mm]

Measurement Range	-60 to 155°C
Temperature Durability	-70 to 180°C
Accuracy	Avg. ±0.5°C at -40 to 80°C Avg. ±1.0°C at -60 to -40°C, 80 to 100°C Avg. ±2.0°C at 100 to 155°C
Response Time (90%)	Approx. 150 sec. (in air) Approx. 7 sec. (in agitated water)
Waterproof Capacity	Submersible (stainless protection tube) Immersion proof (cable)
Notes	Can be extended by 3 meters with the Extension Cable TR-1C30 / TR-5C10

TR-1320



Stainless Protection Sensor

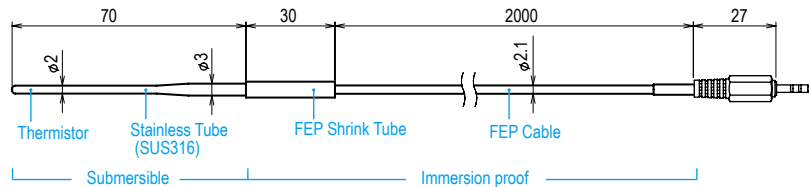


[Unit: mm]

Measurement Range	-60 to 155°C
Temperature Durability	-70 to 180°C
Accuracy	Avg. ±0.5°C at -40 to 80°C Avg. ±1.0°C at -60 to -40°C, 80 to 100°C Avg. ±2.0°C at 100 to 155°C
Response Time (90%)	Approx. 150 sec. (in air) Approx. 7 sec. (in agitated water)
Waterproof Capacity	Submersible (stainless protection tube) Immersion proof (cable)
Notes	Can be extended by 3 meters with the Extension Cable TR-1C30 / TR-5C10

## TR-5101



### Fluoropolymer Coated Sensor



[Unit: mm]


Measurement Range	-60 to 155°C
Temperature Durability	-70 to 180°C
Accuracy	Avg. $\pm 0.3^\circ\text{C}$ at -20 to 80°C Avg. $\pm 0.5^\circ\text{C}$ at -40 to -20°C, 80 to 110°C Avg. $\pm 1.0^\circ\text{C}$ at -60 to -40°C, 110 to 155°C
Response Time (90%)	Approx. 80 sec. (in air)
Waterproof Capacity	Cable is waterproof
Notes	Can be extended by 3 meters with the Extension Cable TR-2C30

## TR-5106



Provided with TR42, TR-52i, RTR-502 and RTR-502L

### Fluoropolymer Coated Sensor

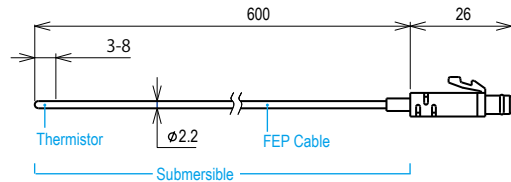


[Unit: mm]

Measurement Range	-60 to 155°C
Temperature Durability	-70 to 180°C
Accuracy	Avg. $\pm 0.3^\circ\text{C}$ at -20 to 80°C Avg. $\pm 0.5^\circ\text{C}$ at -40 to -20°C, 80 to 110°C Avg. $\pm 1.0^\circ\text{C}$ at -60 to -40°C, 110 to 155°C
Response Time (90%)	Approx. 80 sec. (in air) Approx. 7 sec. (in agitated water)
Waterproof Capacity	Submersible
Notes	Can be extended by 3 meters with the Extension Cable TR-2C30

## TR-5220



### Stainless Protection Sensor

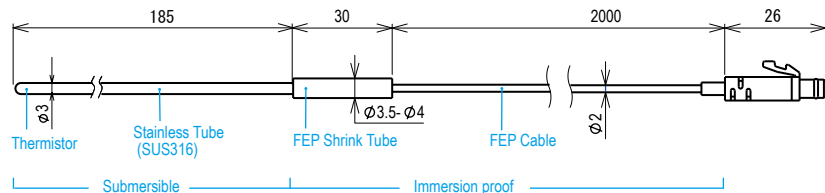


[Unit: mm]

Measurement Range	-60 to 155°C
Temperature Durability	-70 to 180°C
Accuracy	Avg. $\pm 0.3^\circ\text{C}$ at -20 to 80°C Avg. $\pm 0.5^\circ\text{C}$ at -40 to -20°C, 80 to 110°C Avg. $\pm 1.0^\circ\text{C}$ at -60 to -40°C, 110 to 155°C
Response Time (90%)	Approx. 150 sec. (in air) Approx. 7 sec. (in agitated water)
Waterproof Capacity	Submersible (stainless protection tube) Immersion proof (cable)
Notes	Can be extended by 3 meters with the Extension Cable TR-2C30

**TR-5320**



**Stainless Protection Sensor**

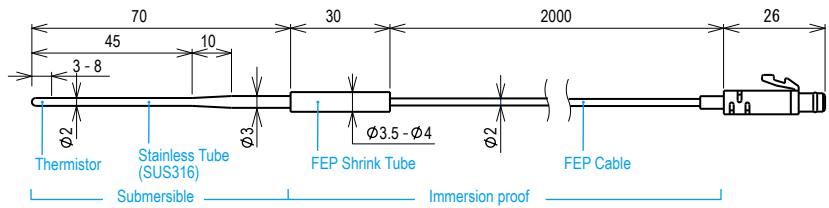


[Unit: mm]

Measurement Range	-60 to 155°C
Temperature Durability	-70 to 180°C
Accuracy	Avg. ±0.3°C at -20 to 80°C Avg. ±0.5°C at -40 to -20°C, 80 to 110°C Avg. ±1.0°C at -60 to -40°C, 110 to 155°C
Response Time (90%)	Approx. 90 sec. (in air) Approx. 3 sec. (in agitated water)
Waterproof Capacity	Submersible (stainless protection tube) Immersion proof (cable)
Notes	Can be extended by 3 meters with the Extension Cable TR-2C30

**TR-5420**



**Stainless Protection Sensor**

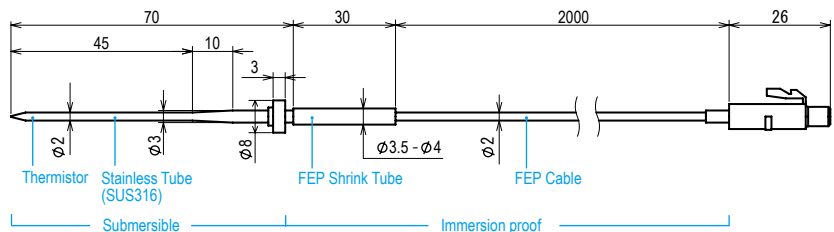


[Unit: mm]

Measurement Range	-60 to 155°C
Temperature Durability	-70 to 180°C
Accuracy	Avg. ±0.3°C at -20 to 80°C Avg. ±0.5°C at -40 to -20°C, 80 to 110°C Avg. ±1.0°C at -60 to -40°C, 110 to 155°C
Response Time (90%)	Approx. 90 sec. (in air) Approx. 3 sec. (in agitated water)
Waterproof Capacity	Submersible (stainless protection tube) Immersion proof (cable)
Notes	Can be extended by 3 meters with the Extension Cable TR-2C30

**TR-5530**



**Underwater Sensor**

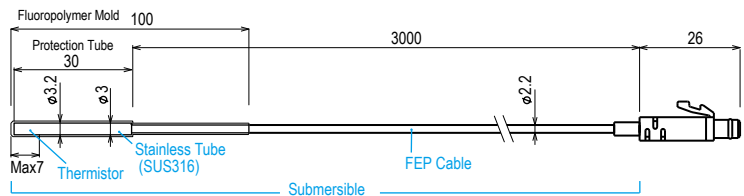


[Unit: mm]

Measurement Range	-60 to 155°C
Temperature Durability	-70 to 180°C
Accuracy	Avg. ±0.3°C at -20 to 80°C Avg. ±0.5°C at -40 to -20°C, 80 to 110°C Avg. ±1.0°C at -60 to -40°C, 110 to 155°C
Response Time (90%)	Approx. 150 sec. (in air) Approx. 15 sec. (in agitated water)
Waterproof Capacity	Submersible
Notes	Can be extended by 3 meters with the Extension Cable TR-2C30

# TR-5620



## High Sensitivity Ultra-thin Sensor

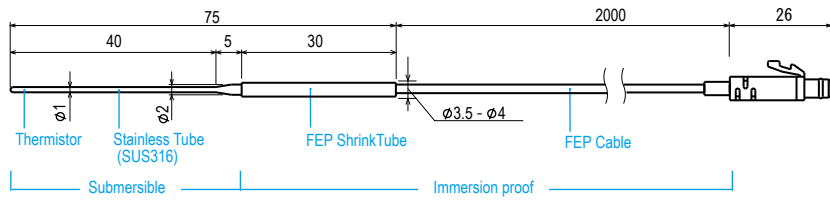

[Unit: mm]

Measurement Range	-60 to 155°C
Temperature Durability	-70 to 180°C
Accuracy	Avg. $\pm 0.5^\circ\text{C}$ at -20 to 60°C Avg. $\pm 1.0^\circ\text{C}$ at -60 to -20°C, 60 to 80°C Avg. $\pm 2.0^\circ\text{C}$ at 80 to 155°C
Response Time (90%)	Approx. 50 sec. (in air) Approx. 1 sec. (in agitated water)
Waterproof Capacity	Submersible (stainless protection tube) Immersion proof (cable)
Notes	Can be extended by 3 meters with the Extension Cable TR-2C30

# Pt Sensors



Model Number **TR-81**□□-□.□-□□□□-□□M  
[A] [B] [C] [D]

To order, create the model number by selecting A, B, C, and D (See below).


**[A]** Sensor Type (2 digits) **[B]** Protection Tube Diameter (2 digits)  
**[C]** Protection Tube Length (4 digits) **[D]** Cable Length (2 digits)

Sensor Device	Pt100	Range of Error	$\pm(0.15+0.002xt)$ °C t = absolute value of measurement
Electrical Current	2mA		
Insulation Resistance	DC500V over 10M $\Omega$	Waterproof Capacity	None only stainless protection pipe is water resistant
Conductor	3 wire type		

## [A] Sensor Type (Select from 4 types)

### TR-8100 Economical Type

Measurement Range: -50 to 200°C  
 Thermal Constant Time\* :  
 In agitated water: about 4.5 seconds

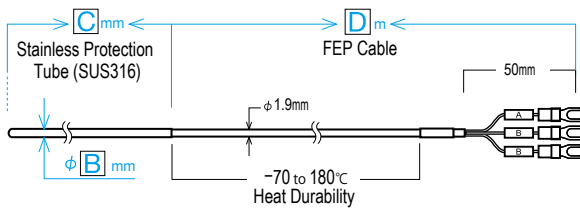


### TR-8110 Regular Type

Measurement Range: -200 to 350°C  
 Thermal Constant Time\* :  
 In agitated water: about 2 seconds


### TR-8120 Low to High Temp Type

Measurement Range: -200 to 500°C  
 Thermal Constant Time\* :  
 In agitated water: about 2 seconds

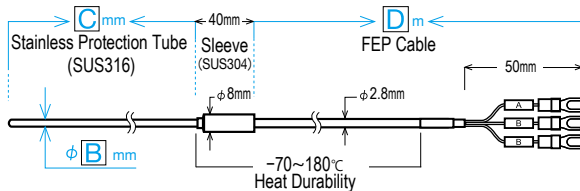

### TR-8130 Handy Type

Measurement Range: -50 to 200°C  
 Thermal Constant Time\* :  
 In agitated water: about 2.5 seconds

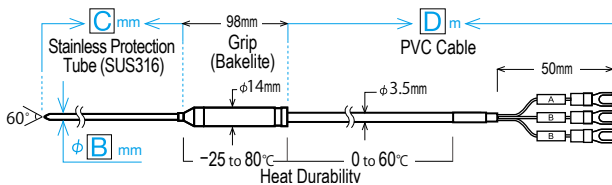

\* Stated thermal constant time is for sensors with a protection tube diameter of  $\phi$  3.2.

## [B] Protection Tube Diameter

		[A] Sensor Type			
		TR-8100	TR-8110	TR-8120	TR-8130
$\phi$ [B] mm	2.0	-	○	-	-
	2.3	○	○	-	-
	3.0	○	○	-	-
	3.2	◎	◎	◎	◎
	4.8	○	○	○	○
	6.0	○	○	-	-
	6.4	-	-	○	-

◎ Recommended ○ Available - Not Available

## [C] Protection Tube Length

The protection tube is available in 50 millimeter units in lengths from 50mm to 2000mm.

## [D] Cable Length

The sensor cable is available in 1 meter units in lengths from 1 meter to 99 meters.


### Notes:

- Our sensors are produced only upon order, therefore please allow four weeks from time of order until shipping.
- The thermistor (temperature detection section) is mounted in the tip of the sensor.

## TR-1C30



### Sensor Extension Cable

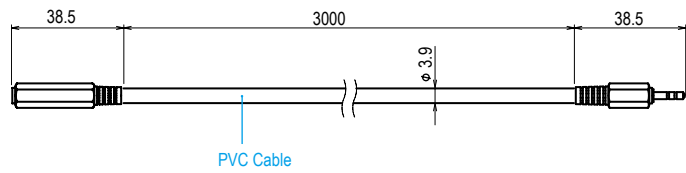


[Unit: mm]

Temperature Durability	-25 to 60°C
Waterproof Capacity	None
Compatible Sensors	Temperature Sensor: TR-1106, TR-1220, TR-1320, TR-0106, TR-0206, TR-0306, TR-0406, TR-0506, TR-0706 Temp-Humidity Sensor: THA-3001, THA-3151, SHA-3151 (Previous Model HHA-3151) Illuminance-UV Sensor: ISA-3151 Input Cable: VR-7101, VR-7102, VR-7103
Conditions for Use	Temperature sensors can use up to 3 meters of extension cables. Temp-Humidity sensors and Illuminance-UV sensors can use up to 9 meters of extension cables. Input cables can use multiple extension cables.

## TR-5C10



### Sensor Extension Cable

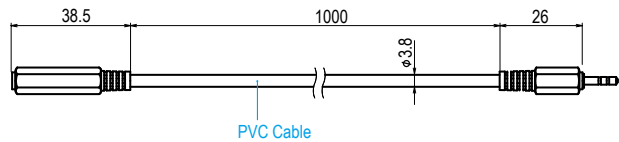


[Unit: mm]

Temperature Durability	-25 to 60°C
Waterproof Capacity	None
Compatible Sensors	Temperature Sensor: TR-1106, TR-1220, TR-1320, TR-0106, TR-0206, TR-0306, TR-0406, TR-0506, TR-0706, Temp-Humidity Sensor: THA-3001, THA-3151, SHA-3151, TR-3100 * (Previous Model HHA-3151) Illuminance-UV Sensor: ISA-3151
Conditions for Use	Temperature sensors can use up to 3 meters of extension cables. Temp-Humidity sensors and Illuminance-UV sensors can use up to 9 meters of extension cables. * Only 1 extension cable for TR-3100

## TR-2C30



### Sensor Extension Cable

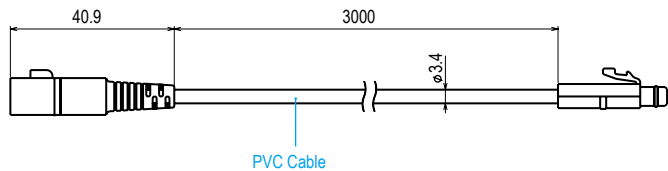

[Unit: mm]

Temperature Durability	-25 to 60°C
Waterproof Capacity	Splash proof (rated for use in daily life)
Compatible Sensors	Temperature Sensor: TR-5101, TR-5106, TR-5220, TR-5320, TR-5420, TR-5530, TR-5620
Conditions for Use	Only one cable per sensor.